

Outdoor High-voltage Dropout Fuse Cutouts

Porcelain Housing Dropout Fuse Cutouts



12kV-15kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	12	100	6300	110	40	250	6.5	39X30X10
XK ₁	RW12	12	200	12500	110	40	250	6.6	



12kV-15kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	12	100	6300	110	40	250	6.5	39X30X10
XK ₁	RW12	12	200	12500	110	40	250	6.6	



12kV-15kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	12	300	1600	110	42	230	7.7	40X30X11
XK ₁	RW12	12	400	1600	110	42	230	8.2	



15kV-24kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	15	100	8000	125	45	320	8.3	50X36X12.5
XK ₁	RW12	15	200	10000	125	45	320	8.4	



15kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁ -F	RW12	15	100	8000	125	45	320	8	58X40X15
XK ₁ -F	RW12	15	200	12500	125	45	320	8	



15kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	15	100	8000	125	45	320	8.3	50X36X12.5
XK ₁	RW12	15	200	10000	125	45	320	8.4	



15kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	15	100	8000	125	45	320	8.3	50X36X12.5
XK ₁	RW12	15	200	10000	125	45	320	8.4	



24kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₁	RW12	24	100	6300	150	65	470	11	50X38X12
XK ₁	RW12	24	200	10000	150	65	470	11.5	



15kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₂	RW12	15	100	10000	125	45	320	7.5	50X36X12.5
XK ₂	RW12	15	200	12500	125	45	320	7.5	



33kV-36kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₂	RW12	33	100	10000	170	70	660	13.2	64X35X18
XK ₂	RW12	33	200	12500	170	70	660	13.5	



33kV-36kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK2	RW12	35	100	6300	170	70	720	14	63X37X16.5
XK2	RW12	35	200	12500	170	70	720	15	



33kV-36kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
Xk ₁	RW12	33	100	1000	170	70	660	13.2	64X35X18
XK ₁	RW12	33	200	12500	170	70	660	13.5	




15kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₃	RW12	15	100	8000	125	45	340	7.5	50X36X12.5
XK ₃	RW12	15	200	12500	125	45	340	7.5	



12kV-15kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₃ -F	RW12	15	100	8000	125	45	340	8	58X40X15
XK ₃ -F	RW12	15	200	12500	125	45	340	8	

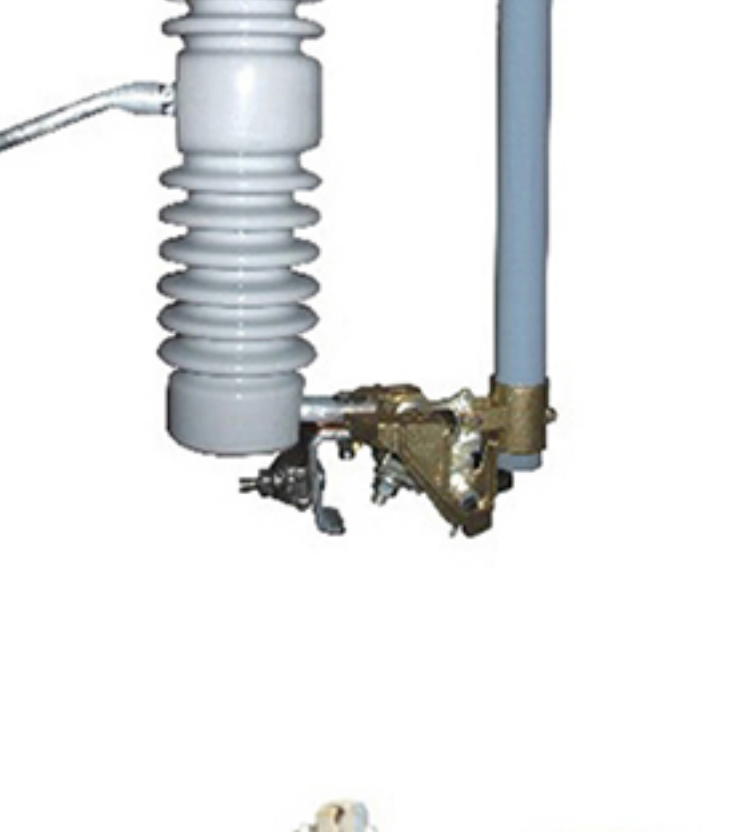

15kV-27kV

Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK-15	15	100	6300	125	45	400	6.5	51X33X11.5
XK-15	15	200	12500	125	45	400	7	



15kV-27kV

Code 代码	Type 型号	Rated Voltage 额定电压 (kV)	Rated Current 额定电流 (A)	Breaking Current 开断电流 (A)	Impulse Voltage 冲击电压 (BIL)	Power- frequency withstand voltage 工频耐压 (kV)	Leakage distance 爬距 (mm)	Weight 重量 (kg)	Dimensions 包装尺寸 组装 (cm)
XK ₄	RW12	24	100	6300	110	40	470	6.5	40X36X11.5
XK ₄	RW12	24	200	12500	110	40	470	6.5	